


PLAN

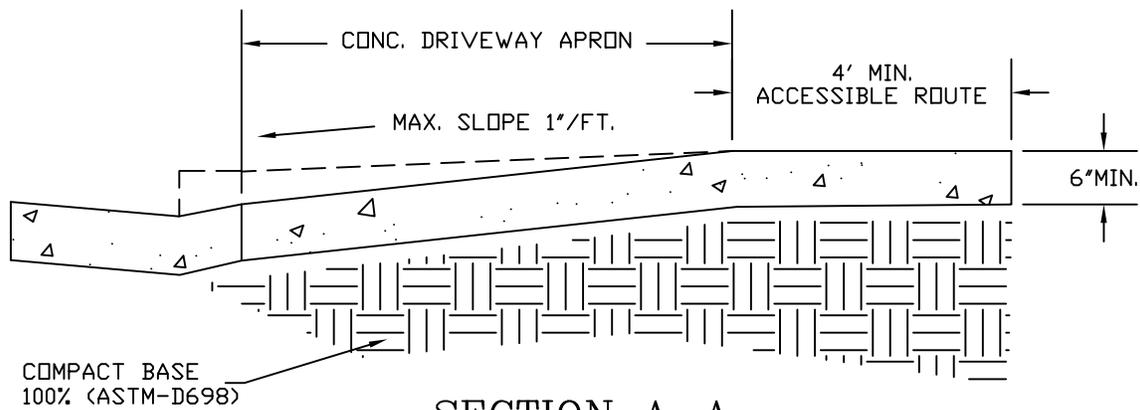

SECTION A-A

NOTES:

1. COMPACT DRIVEWAY BASE MATERIAL IN CITY RIGHT-OF-WAY 100% (ASTM-D698) AS PER SECTION 02200, PART 3.01B OF CITY TECHNICAL SPECIFICATIONS.
2. CONCRETE DRIVEWAY SHOULD BE NO LESS THAN 6" THICK IN CITY RIGHT-OF-WAY AS PER SECTION 03300 CHAPTER 1.3 AND REINFORCED WITH FIBERMESH AS PER SECTION 03300 CHAPTER 5 WITH A COMPRESSIVE STRENGTH OF NOT LESS THAN 5000 PSI AS PER SECTION 03300, CHAPTER 3.2.
3. SLOPE OF DRIVEWAY TO STREET TO BE NO MORE THAN 1" PER FOOT EXCEPT ALONG ACCESSIBLE ROUTE CROSS-SLOPE CAN BE NO MORE 2%.
4. 2'x4' TRUNCATED DOME BRICK DETECTABLE WARNINGS MAY BE REQUIRED IF SPECIFIED. REFER TO DETAILS P6 AND P6B FOR WARNING AREA SPECIFICATIONS.

STANDARD CONSTRUCTION  
DETAILS



DRIVEWAY DETAIL

PLATE NUMBER:

P05B

APPROVED:

SIGNATURE ON FILE  
CITY ENGINEER

SCALE: N.T.S.

DATE: FEBRUARY 2009