


PLAN VIEW W/O TREELAWN

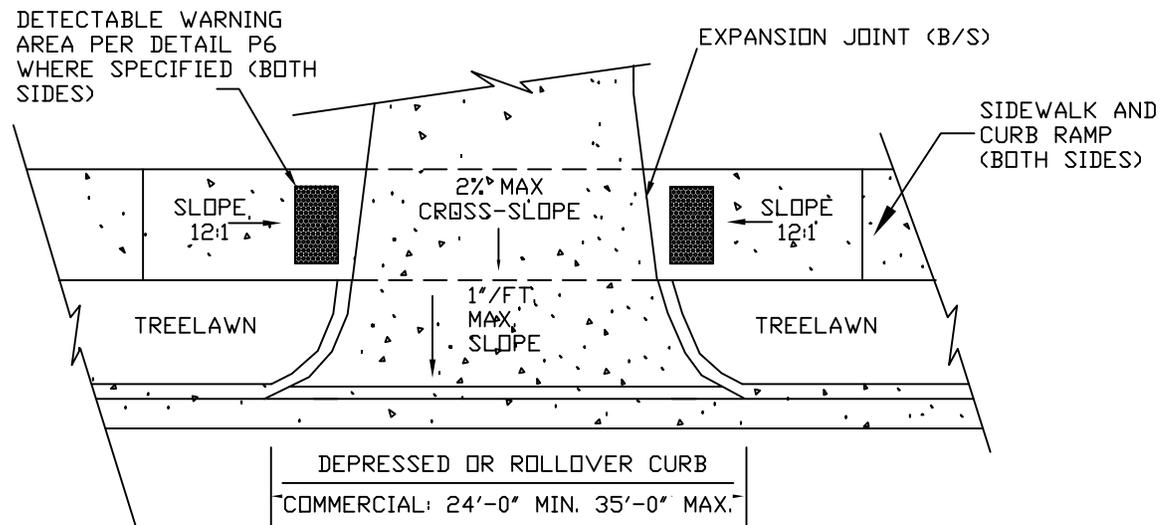

PLAN VIEW W/ TREELAWN

- NOTES:
1. BASE SHALL BE SUITABLE SOIL MATERIAL PER SECTION 02200, PART 1.01 B AND D. COMPACT DRIVEWAY BASE MATERIAL IN CITY RIGHT-OF-WAY 100% (ASTM-D698) PER SECTION 02200, PART 3.01B OF CITY TECHNICAL SPECIFICATIONS.
 2. CONCRETE DRIVEWAY SHOULD BE NO LESS THAN 8" THICK IN CITY RIGHT-OF-WAY AND REINFORCED WITH FIBERMESH OR STEEL PER SECTION 03300 CHAPTER 5 WITH A COMPRESSIVE STRENGTH OF NOT LESS THAN 5000 PSI AS PER SECTION 03300, CHAPTER 3.2.
 3. SLOPE OF DRIVEWAY TO STREET TO BE NO MORE THAN 1" PER FOOT EXCEPT ALONG ACCESSIBLE ROUTE CROSS-SLOPE CAN BE NO MORE THAN 2%.
 4. 2'x4' TRUNCATED DOME BRICK DETECTABLE WARNINGS ARE REQUIRED ON BOTH SIDES OF THE DRIVEWAY ALONG THE ACCESSIBLE PATH IF SPECIFIED. REFER TO DETAILS P6 AND P6B FOR DETECTABLE WARNING SPECIFICATIONS.

STANDARD CONSTRUCTION DETAILS



CITY OF *savannah*

HEAVY DUTY COMMERCIAL DRIVEWAY

PLATE NUMBER:
P05C

APPROVED: _____
SIGNATURE ON FILE
CITY ENGINEER

SCALE: N.T.S.
DATED: JANUARY 2009