




PERVIOUS CONCRETE TYPICAL INSTALLATION

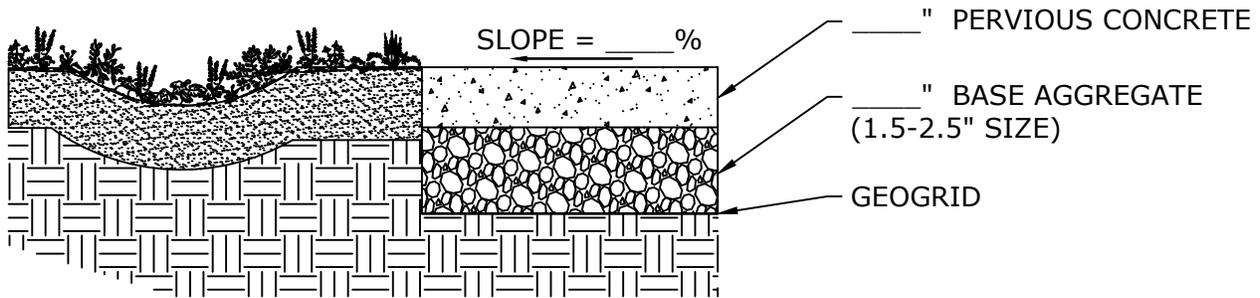

PERVIOUS CONCRETE WITH BIOSWALE OUTLET

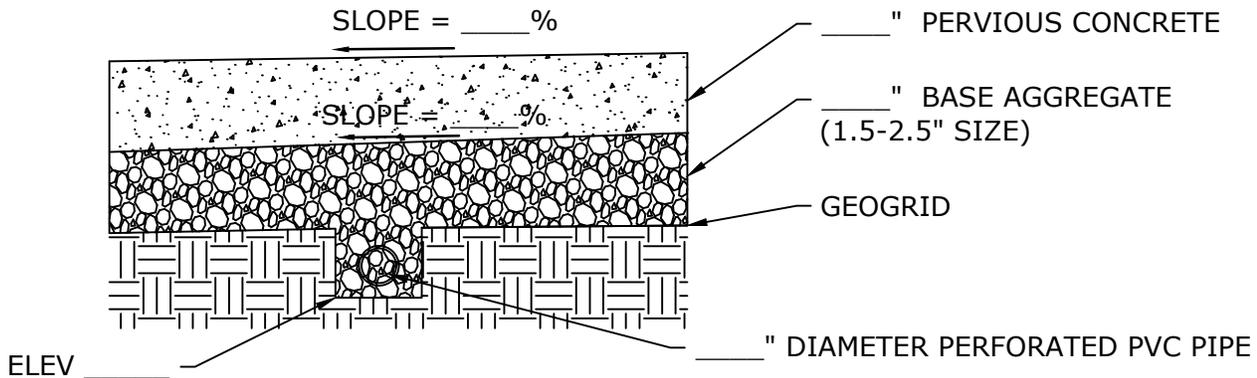

PERVIOUS CONCRETE WITH TRENCH OUTLET

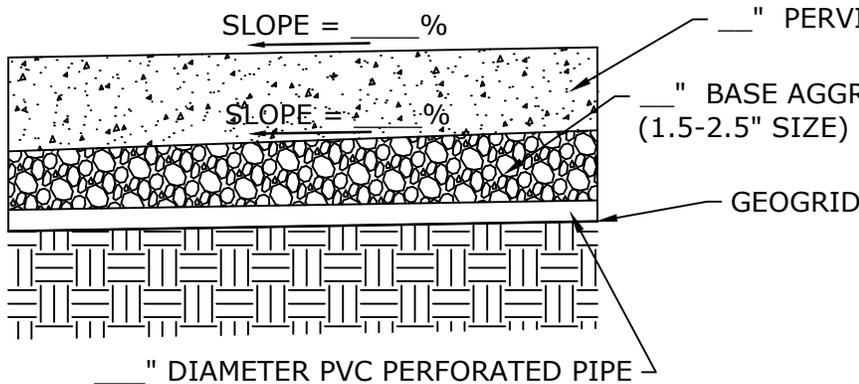

PERVIOUS CONCRETE WITH UNDERDRAIN SYSTEM

NOTES TO DESIGNERS

1. MINIMUM BASE THICKNESS IS 12".
2. USE GEOGRID AS NEEDED FOR DESIGN.
3. PERVIOUS CONCRETE SHOULD BE BETWEEN 6 AND 15 INCHES.
4. MAXIMUM SLOPE IS 5%.
5. MIN. TRENCH WIDTH IS 18".
6. MIN. 4" DIAMETER FOR PERFORATED PVC PIPE.

STANDARD CONSTRUCTION  
DETAILS



PERVIOUS CONCRETE

PLATE NUMBER:

D24

APPROVED:

*Quinn M. [Signature]*  
CITY ENGINEER

SCALE: N.T.S.

DATED: NOV 2021